

M12A-Coded Power Cables

N-Tron Networking Series



▶▶▶ IP67 Rated Power Cables




M12 IP67 Rated Power Cables

PRODUCT FEATURES

- IP67 rated power cable for use with N-Tron's M12 products
- M12 A code connector, bare wire
- -40°C to 85°C operating temperature
- 18AWG 4 conductor cable
- Stranding: 7 x 26
- Insulation thickness: 0.010 in. (.254 mm)
- Jacket Thickness: 0.025" (0.64mm)
- Nominal O.D. 0.254" (6.45mm)

BUILT FOR EXTREME CONDITIONS

- Water and sunlight resistant
- Suitable for direct burial
- Indoor / Outdoor use
- PLTC-ER, FPL, CMG, FT4
- PVC Insulation with Rip Cord

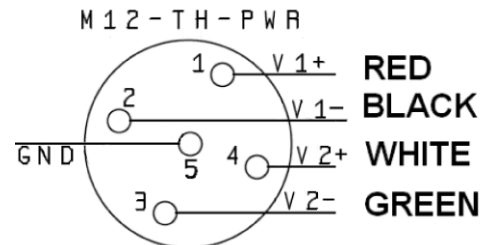

ORDERING INFORMATION

PART NUMBER

DESCRIPTION

PWR-M12-A-X

Power Cable, M12 A-Coded Straight Female to bare end, Shielded

PWR-RM12-A-X

Power Cable, M12 A-Coded 90° Female to bare end, Shielded

Where:

X = length of cable, fill in desired amount in feet.

Example: PWR-M12-A-X10 (for a 10 ft cable)

