

NOT SET UP: Remote Network Monitoring Software

N-View™ OPC - OLE for Process Control Server for N-TRON Switches Transforms your HMI into a Complete Remote Network Monitoring Tool

Port Counters	S			×
Switch: STA # 023 IP Address: 192.168.1.6 Port: DRV # 007 Speed: 100 Duplex: Full	, Link:	Up N-Ring Version: Yes N-Ring Manager:	-	Close Member: No State: Ok
Usage: 0			100%	Select the port from the list below:
Tx Octets Tx Dropped Packets Tx Broadcast Packets Tx Multicast Packets Tx Collisions Tx Single Collision Tx Mutiple Collision Tx Deferred Tx Late Collision Tx Frame In Disc Tx Frame In Disc Tx Pause Packets 64 Packets 65 to 127 Packets 128 to 255 Packets 256 to 511 Packets	5.34 4052024 0 568 14346 2992 0 0 0 0 0 0 0 0 0 0 264937 2545888 10160661 1442929	4% Rx Octets Rx Dropped Packets Rx Broadcast Packets Rx Multicast Packets Rx Unicast Packets Rx Undersize Packets Rx Oversize Packets Rx Jabbers Rx Alignment Errors Rx Good Octets Rx SA Changes Rx FCS Errors Rx Pause Packets Rx Fragments Rx Excessive Disc Size Rx Symbol Errors 1024 to 1522 Packets	39844501556 0 9 17890849 0 0 0 3984501780 0 0 0 0 0 101606610 0 0	PLC # 001 DRV # 001 DRV # 002 DRV # 003 DRV # 004 DRV # 005 DRV # 006 HMI # 001 HMI # 001 HMI # 002 PLC # 002 I/O # 001 I/O # 002 DRV # 007 DRV # 008 I/O #003 CAM # 003

The N-Tron[®] N-View[™] OLE for Process Control (OPC) Server Software will work with industrial standard OPC Client software and most popular Human Machine Interface (HMI) packages to provides complete remote network traffic and status monitoring for N-Tron 300-N, 500-N, 500-A, 700, 7000, and NT-24K switch series with the N-View Firmware. N-Tron Industrial Ethernet Switches offer outstanding performance and ease of use. They are ideally suited for connecting Ethernet enabled industrial and/or security equipment requiring mission critical reliability. The N-View OPC Server in combination with one or more of our industrial switches will add complete network visibility to an HMI Control and Monitoring application.

N-View Switch Firmware

N-View capable switches will autocast a small Ethernet packet periodically containing a port-by-port status of the switch. This information includes 5 switch level data points and 41 data points per port. This data is captured by the N-View OPC Server Software and can be displayed by application software running in the same Windows environment with OPC Client capability.

Ease of Use

The N-Tron N-View OPC Software includes the OPC Server and a configuration software utility. The configuration software will automatically search the network for all N-View enabled switches using the unique IEEE MAC addresses to identify each switch. The Switch MAC address can be selected and assigned a 80 character alias name. Meaningful alias names can also be added to all ports using the configuration software. The switch and port alias names can be saved and used by the N-View OPC Server as part of the switch variable names. The alias names can be used to help identify the location of the switch and the areas or equipment connected to the ports.

N-View OPC Data Variables

N-View OPC Server data variables can be accessed by most popular HMI or other application software packages with OPC client capability. These variables can be divided into three general categories.

Status variables indicate the operating condition of the switch or port.

Traffic variables count the number of OCTETS (BYTES) of a specific type of ethernet packet that have passed through a port since the start of the switch.

Error variables count the number of packet errors seen at each port since the start of the switch. N-View OPC variables are presented to the OPC Client application software as string variables. Most HMI software packages can convert these variables to the data type required for display, alarming, and trending during the data import process.


High Quality and Reliability

N-Tron is a worldwide leader in Industrial Networking technology and offers proven reliability quality, and service.



N-View[™] OPC and N-View Switch Ordering Information

User Assigned Port Alias Name

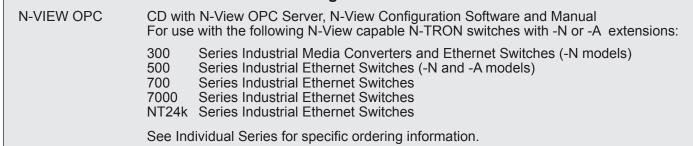

N-View Variable Specifications

N-View Switch Variables

Switch AliasUser Assigned Alias NameSwitch StatusOnline/OfflineSwitch Last_UpdateSeconds since last unicast updateSwitch MAC_AddressSwitch MAC AddressSwitch Total_PortsTotal number of ports on switch

Half / Full / NA Up / Down 1 to 24 10 / 100 / NA 0.00 to 100% On / Off

N-View Port Status Variables

Port Alias	
Port Duplex	
Port Link_Status	
Port PortId	
Port Speed	
Port Usage	
Port_Enable/Disable	

N-View Port Error Variables

Port rx_alignment_errors
Port rx_drop_pkts
Port rx_fcs_errors
Port rx_fragments
Port rx_jabbers
Port rx_over_size_pkts
Port rx_sa_changes
Port rx_symbols_errors
Port rx_under_size_pkts
Port tx_deferred_transmit
Port tx_drop_pkts
Port tx_excessive_collision
Port tx_frame_in_disc
Port tx_late_collision

BYTE Count from Start BYTE Count from Start

N-View Port Traffic Variables

	0100
Port pkts_64_octets	BYTE Count from Start
Port pkts_65to127_octets	BYTE Count from Start
Port pkts_128to255_octets	BYTE Count from Start
Port pkts_256to511_octets	BYTE Count from Start
Port pkts_512to1023_octets	BYTE Count from Start
Port pkts_1024to1522_octets	BYTE Count from Start
Port rx_octets	BYTE Count from Start
Port rx_good_octets	BYTE Count from Start
Port rx_broadcast_pkts	BYTE Count from Start
Port rx_multicast_pkts	BYTE Count from Start
Port rx_unicast_pkts	BYTE Count from Start
Port rx_pause_pkts	BYTE Count from Start
Port tx_octets	BYTE Count from Start
Port tx_collisions	BYTE Count from Start
Port tx_multiple_collision	BYTE Count from Start
Port tx_single_collision	BYTE Count from Start
Port tx_broadcast_pkts	BYTE Count from Start
Port tx_multicast_pkts	BYTE Count from Start
Port tx_unicast_pkts	BYTE Count from Start
Port tx_pause_pkts	BYTE Count from Start

Minimum System Requirements

Windows NT4.0 w/SP4 or later Windows 2000 Windows XP Windows Vista (requires administrator privileges) Windows 2003 Server (requires administrator privileges) Windows 7, 32-bit



www.redlion.net

Connect. Monitor. Control.

Americas sales@redlion.net

Asia-Pacific asia@redlion.net

Europe Middle East Africa europe@redlion.net

+1 (717) 767-6511

As the global experts in communication, monitoring and control for industrial automation and networking, Red Lion has been delivering innovative solutions for over forty years. Our award-winning technology enables companies worldwide to gain real-time data visibility that drives productivity. Product brands include Red Lion, N-Tron and Sixnet. With headquarters in York, Pennsylvania, the company has offices across the Americas, Asia-Pacific and Europe. For more information, please visit www.redlion.net. Red Lion is a Spectris company.