

▶▶▶ Modular Industrial Ethernet Switch

The N-TRON® 900B Modular Industrial Ethernet Switch offers outstanding performance, ease of use, and flexible expansion options. It is ideally suited for connecting Ethernet enabled industrial equipment such as PLC's, Industrial PC's, Ethernet I/O and Data Acquisition Equipment. The N-TRON 900B Modular Industrial Ethernet Switch is built to operate reliably in industrial applications.

Product Features

- Full IEEE 802.3 Compliance
- Up to Twenty Four 10/100BaseTX Ports
- Up to Twelve 100BaseFX Ports, ST or SC
- Extended Environmental Specifications
- Scaleable Three Slot Switch
- Flexible Combinations of TX & FX Modules
- Support for Full/Half Duplex Operation
- LED Link/Activity Status Indication
- Auto Sensing Speed and Flow Control
- Store-and-Forward Technology
- Auto Cable Sensing (MDIX)
- Up to 2.6 Gb/s Maximum Throughput
- Rugged Industrial DIN-Rail Enclosure
- Redundant Power Inputs (10-30 VDC)
- N-View™ Switch Monitoring Option

Flexibility

Mix and match fiber ports with twisted pair ports. Three module slots are available for the installation of 900 Series expansion modules providing maximum flexibility. Up to 24 twisted pair 10/100BaseTX or 12 100BaseFX fiber ports can be installed with multiple combinations available in between. Any expansion module can be installed in any slot.

Industrial Packaging and Specifications

The 900B is designed to operate in industrial environments. It is housed in a rugged steel enclosure and standard 35mm DIN-RAIL mounting. An Optional kit is available for rackmount applications. Like all N-TRON products, the 900B comes standard with extended temperature ratings, extended shock and vibration specs, redundant power inputs, and a high MTBF.



Ease of Use

The 900B is a plug and play device. No configuration is required. All 10/100BaseTX ports are auto sensing and auto configuring. Each port is automatically set for maximum speed and performance. In addition, each twisted pair port has an Auto MDIX feature, eliminating the need for crossover cables. LED's are provided to display the link status and activity of each port as well as power on/off status.

Performance

The 900B uses "state of the art" Ethernet switching technology. This eliminates network collisions and increases network determinism. Up to 12,000 MAC addresses (4,000 per module) are supported enabling sophisticated and complex network architectures. A backplane speed of 2.6 Gb/s allows full wire speed capability on all ports simultaneously.

N-View™ OPC Switch Monitoring Option

The N-TRON N-View OLE for Process Control (OPC) Server Software can be combined with popular HMI software packages to add network traffic monitoring, trending and alarming to any application using N-TRON switches configured with the N-View option. N-TRON's N-View OPC Server collects 41 different traffic variables per port and 5 system level variables per switch. This information can provide a complete overview of the network load, service quality, and packet traffic. OPC client software can use N-View OPC Server data to resolve network problems quickly and improve system reliability.

▶▶▶ 900B Industrial Ethernet Switch Specifications

Case Dimensions

Height:	3.2"	(8.2 cm)
Width:	7.1"	(18.1 cm)
Depth:	4.2"	(10.7 cm)
Weight:	~3.0 lbs	(2.3 kg)

(note: can be mounted horizontally or vertically)

Electrical

Input Voltage:	10-30 VDC
Input Current:	260mA@24V per module
BTU/hr:	59 (fully populated)

Environmental

Operating Temperature:	-20°C to 70°C
Storage Temperature:	-40°C to 85°C
Operating Humidity:	10% to 95% (Non Condensing)
Operating Altitude:	0 to 10,000 ft.

Shock and Vibration (bulkhead mounted)

Shock:	200g @ 10ms
Vibration:	1g, 10-500Hz, triaxial
Seismic:	20g, 5-200Hz, 15s

Fiber Transceiver Characteristics

Fiber Length	2km*	15km**	40km**	80km**
TX Power Min	-19dBm	-15dBm	-5dBm	-5dBm
RX Sensitivity Max	-31dBm	-31dBm	-34dBm	-34dBm
Wavelength	1310nm	1310nm	1310nm	1550nm

* Multimode Fiber Optic Cable
** Singlemode Fiber Optic Cable

Reliability

MTBF:	>2M Hours (measured)
-------	----------------------

Network Media

10BaseT:	>Cat3 Cable
100BaseTX:	>Cat5 Cable
100BaseFX	
Multimode:	50-62.5/125µm
Singlemode:	7-9/125µm

Recommended Wiring Clearance:

Front TX:	2" (5.08 cm)
Front FX:	4" (10.16 cm)
Side:	1" (2.54 cm)

Emissions and Safety Approvals:

FCC Part 15 Class A, CE
UL Listed (US & Canada)
CLASS I, DIV 2, GROUPS A,B,C,D, T4A




Ordering Information

900B	Industrial Ethernet switch chassis with 3 slots for optional expansion modules
900B-N	with N-View™ Firmware Option
900B-FP	Filler Panel
900B-PM	Panel Mount Kit
900-RM	19" Rackmount Kit

Optional Expansion Modules

908TX	Slide in module with Eight ports 10/100BaseTX (RJ-45)
902FX-XX	Slide in module with Two ports 100BaseFX multimode fiber
902FXE-XX-YY	Slide in module with Two ports 100BaseFX singlemode fiber
904FX-XX	Slide in module with Four ports 100BaseFX multimode fiber
904FXE-XX-YY	Slide in module with Four ports 100BaseFX singlemode fiber
Where "XX" is:	ST for ST style fiber connector SC for SC style fiber connector
Where "YY" is:	15 for 15km max. fiber segment length 40 for 40km max. fiber segment length 80 for 80km max. fiber segment length

▶▶▶ 900B Industrial Ethernet Switch Specifications

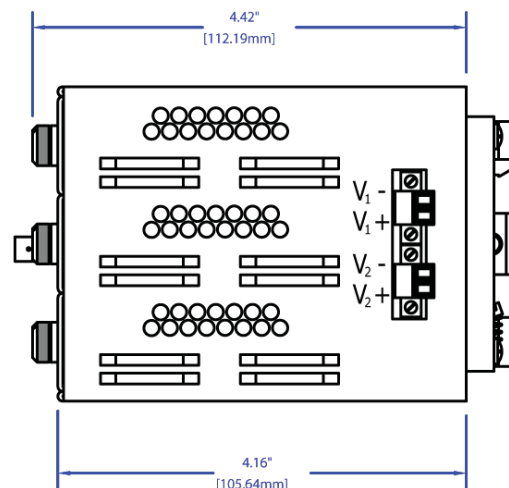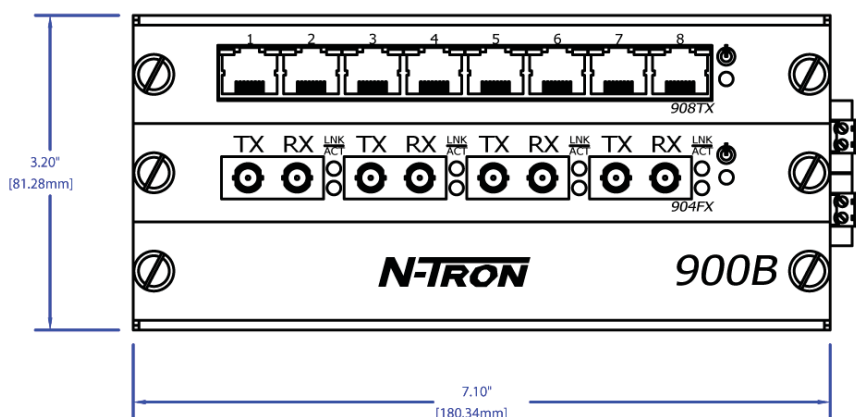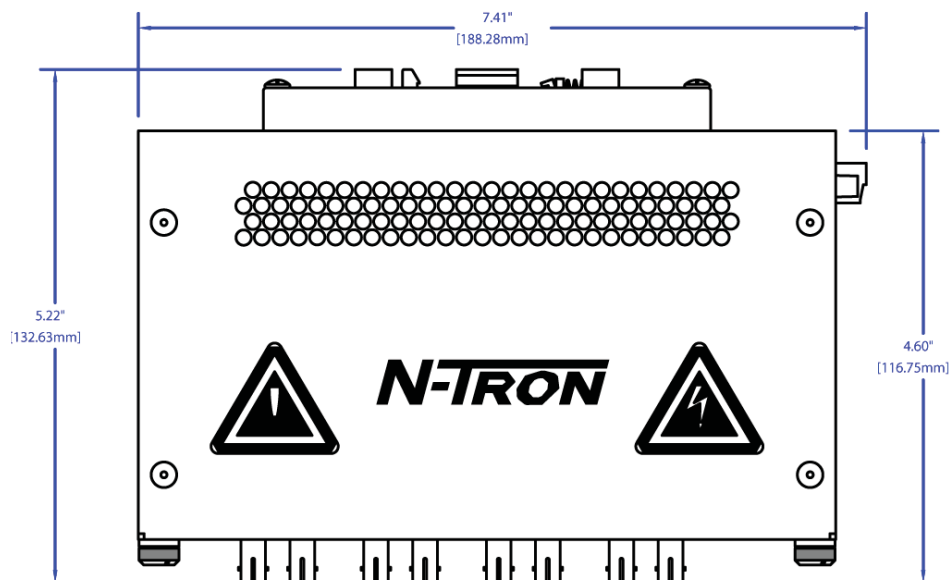

www.redlion.net

Connect. Monitor. Control.

Americas
sales@redlion.net

Asia-Pacific
asia@redlion.net

Europe
Middle East
Africa
europe@redlion.net

+1 (717) 767-6511

As the global experts in communication, monitoring and control for industrial automation and networking, Red Lion has been delivering innovative solutions for over forty years. Our award-winning technology enables companies worldwide to gain real-time data visibility that drives productivity. Product brands include Red Lion, N-Tron and Sixnet. With headquarters in York, Pennsylvania, the company has offices across the Americas, Asia-Pacific and Europe. For more information, please visit www.redlion.net. Red Lion is a Spectris company.

ADLD0365 100913 ©2013 Red Lion Controls