
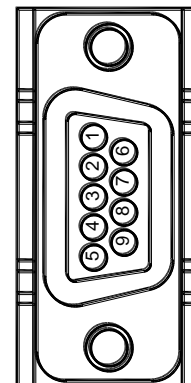
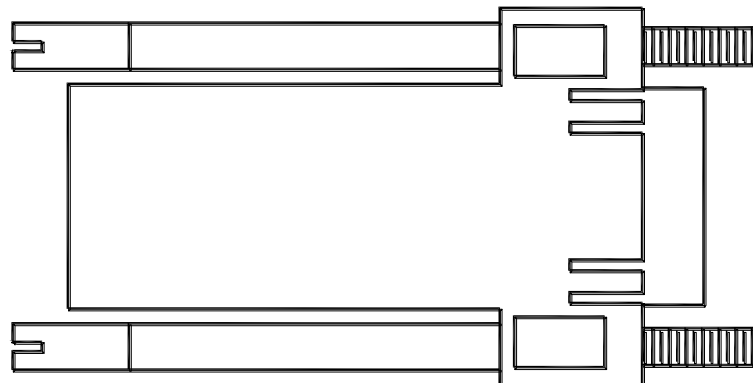


Communication Cable, G3 / Modular Controller / Data Station Plus to Siemens S7 via MPI adapter.


CBL SIE02 – 10’ long (w/o MPI adapter)

CBL SIE03 – 10’ long (MPI adapter included)

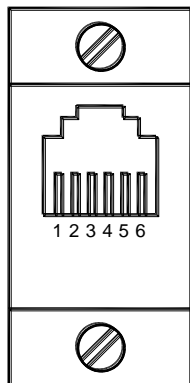

FROM RLC UNIT	Name	Connections	
		CONNECTER PINOUT	
		RJ12	DB9 FEMALE
1	CTS	1	-
2	Rx	2	3
3	COMM	3	5
4	COMM	4	-
5	Tx	5	2
6	RTS	6	6, 8

The above table denotes the pin names of the RS232 port. When connecting, the pin name at the RS232 port is connected to the opposite of that pin name at the destination device.



RS232 PORT
(FROM RLC UNIT)

Revision History

09/02/11 – Added “MPI” to cable descriptions.